



**SPECIFICATION
FOR
LCM Module
KD080FM-8**

MODULE:	KD080FM-8
CUSTOMER:	

REV	DESCRIPTION	DATE
1.0	FIRST ISSUE	2017.07.11

STARTEK	INITIAL	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD080FM-8	REV	V1.1	Page 1 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



Contents

2. Outline dimension	6
3. Input terminal Pin Assignment	7
4. LCD Optical Characteristics	9
4.1 Optical specification	9
4.2 Measuring Condition.....	9
5. Electrical Characteristics	11
5.1 Absolute Maximum Rating (Ta=25 VSS=0V)	11
5.2 DC Electrical Characteristics.....	11
5.3 LED Backlight Characteristics	11
6.SIGNAL TIMING SPECIFICATIONS	14
6.1 Timing Parameters(Sync mode).....	14
6.2 LVDS Rx Interface Timing Parameter	15
The specification of the LVDS Rx interface timing parameter is shown in Table 15	
6.3 Input Signals,Basic Display Colors & Gray Scale Of Colors	16
6.4 Power Sequence.....	17
Power on Sequence	17
Power off Sequence	17
7. LCD Module Out-Going Quality Level	18
7.1 VISUAL & FUNCTION INSPECTION STANDARD	18
7.1.1 Inspection conditions	18
7.1.3 Sampling Plan	19
7.1.4 Criteria (Visual).....	20
8. Reliability Test Result	25
8.1 Condition	25
9. Cautions and Handling Precautions	26
9.1 Handling and Operating the Module.....	26
9.2 Storage and Transportation.....	26
10. Packing	27

Part. No	KD080FM-8	REV	V1.1	Page 3 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持少量
NO MOQ

品种齐全
In Full Range

*** Description**

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This model is composed of a Transmissive type TFT-LCD Panel, driver circuit, back-light unit. The resolution of a 8'TFT-LCD contains 1600X480 pixels, and can display up to 16.7M colors.

*** Features**

-Low Input Voltage: 3.3V(TYP)

-Display Colors of TFT LCD: 16.7M colors

Interface: 6/8Bit LVDS Interface

General Information Items	Specification	Unit	Note
	Main Panel		
Display area(AA)	194.4(H) *58.32(V) (8.0inch)	mm	-
Driver element	TFT active matrix	-	-
Display colors	16.7M	colors	-
Number of pixels	1600(RGB)*480	dots	-
TFT Pixel arrangement	RGB vertical stripe	-	-
Pixel pitch	0.0405 (H) x 0.1215(V)	mm	-
Viewing angle	All	o'clock	-
Controller IC	HX8249 & HX8678	-	-
Display mode	Transmissive/Normally Black	-	-
Operating temperature	-20~+70	°C	-
Storage temperature	-30~+80	°C	-

*** Mechanical Information**

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)		208.00		mm	-
	Vertical(V)		73.00		mm	-
	Depth(D)		5.08		mm	-
Weight			108		g	-

Part. No	KD080FM-8	REV	V1.1	Page 4 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale


长期供货
Long Time supply

支持少量
NO MOQ

品种齐全
In Full Range



1. Block Diagram

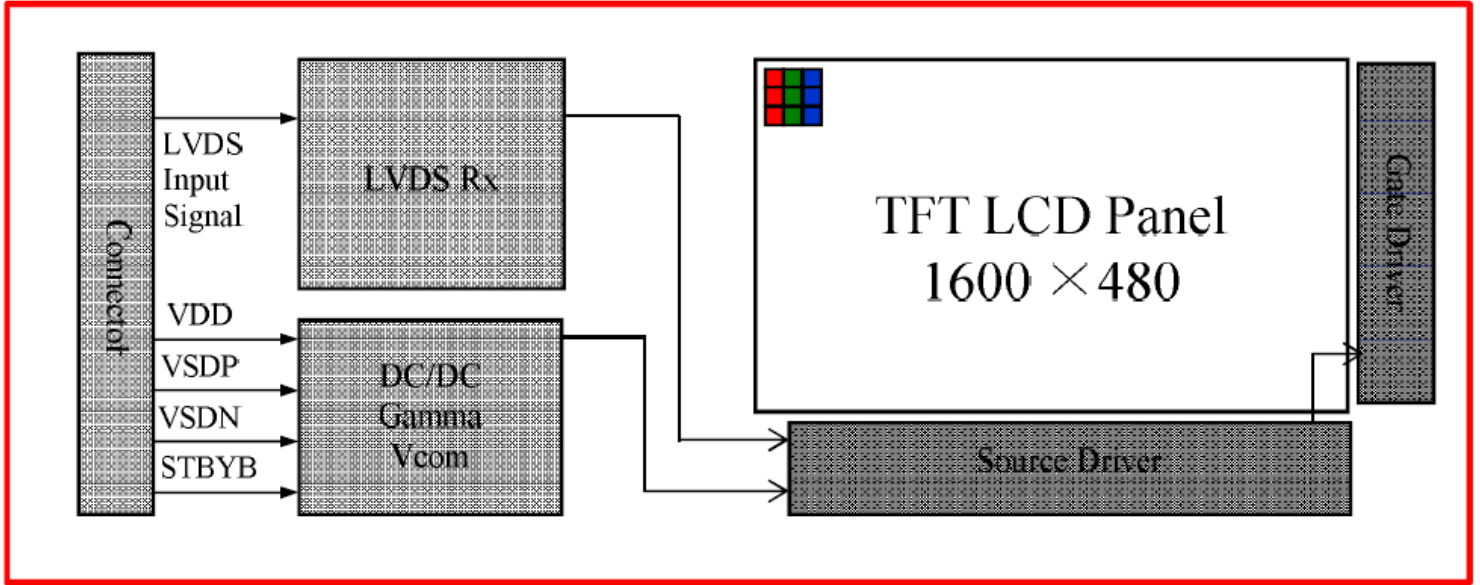

Part. No	KD080FM-8	REV	V1.1	Page 5 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



3. Input terminal Pin Assignment

NO.	SYMBOL	DISCRIPTION	I/O
1	STBYB	Enale IC	Note 1
2	Reset	Reset IC	Note 2
3	VDD	Digital power-3.3v	P
4	VDD	Digital power-3.3v	P
5	SELB	6bit/8bit mode select	Note 3
6	GND	Ground	P
7	GND	Ground	P
8	RXINO-	Negative LVDS differential data input	I
9	RXINO+	Positive LVDS differential data input	I
10	GND	Ground	P
11	RXIN1-	Negative LVDS differential data input	I
12	RXIN1+	Positive LVDS differential data input	I
13	GND	Ground	P
14	RXCLKIN-	Negative LVDS differential data input	I
15	RXCLKIN+	Positive LVDS differential data input	I
16	GND	Ground	P
17	RXIN2-	Negative LVDS differential data input	I
18	RXIN2+	Positive LVDS differential data input	I
19	GND	Ground	P
20	RXIN3-	Negative LVDS differential data input	I
21	RXIN3+	Positive LVDS differential data input	I
22	GND	Ground	P
23	VSDN	Power for Driver IC	P
24	VSDN	Power for Driver IC	P
25	VSDN	Power for Driver IC	P

Part. No	KD080FM-8	REV	V1.1	Page 7 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持少量
NO MOQ

品种齐全
In Full Range



26	VSDP	Power for Driver IC	P
27	VSDP	Power for Driver IC	P
28	VSDP	Power for Driver IC	P
29	GND	Ground	P
30	RL	Horizontal shift direction	Note 4
31	TB	Vertical shift direction	Note 4
32	ATREN	Only for OTP program	I
33	CSB	SPI	-
34	SCL	SPI	-
35	SDA	SPI	-
36	VDD-OTP	7.5V for OTP program	P
37	LED-	LED Cathode	P
38	LED-	LED Cathode	P
39	LED+	LED Anode	P
40	LED+	LED Anode	P

Note 1:

STBYB=H(3.3V),normal operarion.

STBYB=L(GND),timing controller,source driver will run off,all opout are High-Z.

Note2

Suggest to connection with an RC reset circuit for stability,Normally pull high.


(4.7K+0.1uf or extirnal MCU control)

Note 3

If LVDS iput data is 8 bit,SELB must be set to hight.

Note 4

Scan control Input		Scanning direcrion
RL	TB	
VDD	VDD	Up to Down, Left to Right
GND	VDD	Up to Down, Right to left
VDD	GND	Down to Up, Left to Right
GND	GND	Down to Up, Right to left.

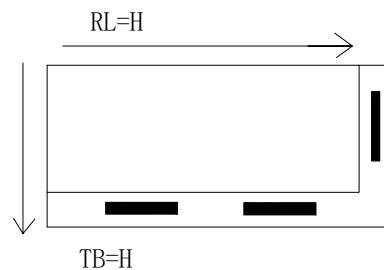

Part. No	KD080FM-8	REV	V1.1	Page 8 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持少量
NO MOQ

品种齐全
In Full Range



4. LCD Optical Characteristics

4.1 Optical specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit.	Note
Contrast Ratio	CR	$\Theta=0$	700	900	--		
Response time	Rising	T_{R+T_F}	Normal viewing angle	--	30	45	msec
	Falling			--			
Color gamut	S(%)		45	50	--	%	
Color Filter Chromaticity	White	W_X		0.252	0.292	0.332	
		W_Y		0.255	0.295	0.335	
	Red	R_X		0.598	0.608	0.628	
		R_Y		0.329	0.349	0.369	
	Green	G_X		0.267	0.307	0.327	
		G_Y		0.527	0.547	0.567	
	Blue	B_X		0.122	0.142	0.162	
		B_Y		0.070	0.090	0.110	
Viewing angle	Hor.	Θ_L	CR>10	--	85	--	
		Θ_R		--	85	--	
	Ver.	Θ_U		--	85	--	
		Θ_D		--	85	--	
Option View Direction	ALL						

4.2 Measuring Condition

- Measuring surrounding: dark room
- Ambient temperature: 25±2°C
- 15min. warm-up time.

Part. No	KD080FM-8	REV	V1.1	Page 9 of 27
----------	-----------	-----	------	--------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ


品种齐全
In Full Range



Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Note (3) Definition of Response Time : Sum of T_R and T_F

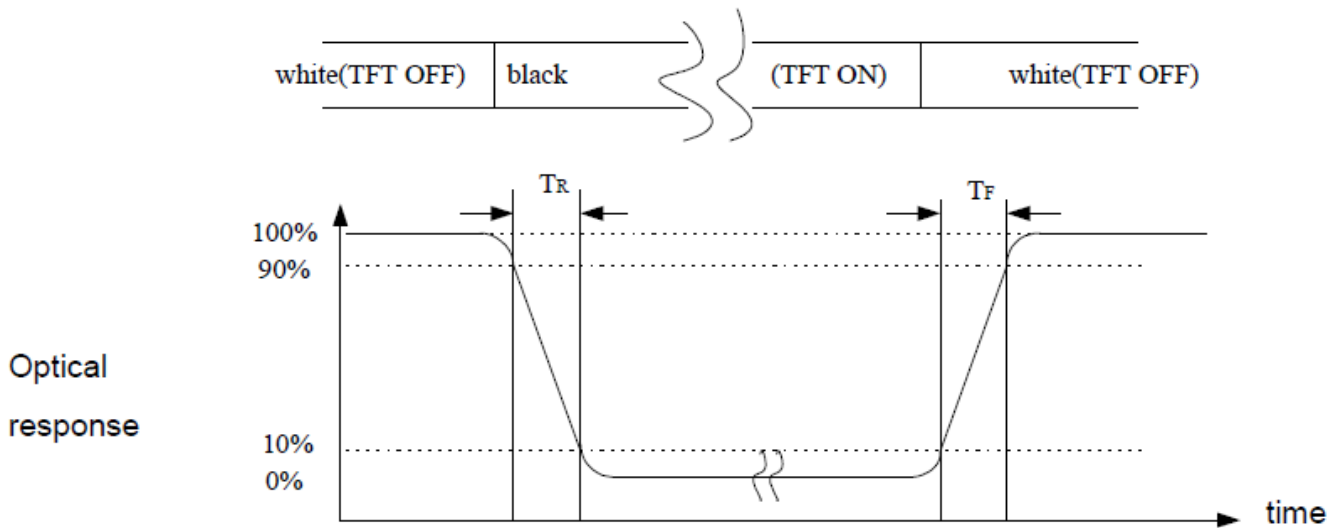

Part. No	KD080FM-8	REV	V1.1	Page 10 of 27
	常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range



5. Electrical Characteristics

5.1 Absolute Maximum Rating (Ta=25 VSS=0V)

Characteristics	Symbol	Min.	Max.	Unit
Digital Supply Voltage	VDD	2.8	3.5	V
Operating temperature	T _{OP}	-20	+70	°C
Storage temperature	T _{ST}	-30	+80	°C

NOTE: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

5.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	VDD	3.0	3.3	3.6	V	
Current consumption VDD	IDD1	--	25	--	mA	
Supply Voltage IC& GAMA	VSDP	5.4	5.5	5.6	V	
Current consumption VSDP	IDD2	--	25	--	mA	
Supply Voltage IC& GAMA	VSDN	-5.4	-5.5	-5.6	V	
Current consumption VSDN	IDD3	--	25	--	mA	

5.3 LED Backlight Characteristics

The back-light system is edge-lighting type with 24 chips White LED

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I _F	60	75	--	mA	
Forward Voltage	V _F	--	25.6	--	V	

Part. No	KD080FM-8	REV	V1.1	Page 11 of 27
----------	-----------	-----	------	---------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



LCM Luminance	Lv	450	500	--	cd/m2	Note3
LED life time	Hr	50000	--	--	Hour	Note1,2
Uniformity	AVg	80	--	--	%	Note3


Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

Ta=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The “LED life time” is defined as the module brightness decrease to 50% original brightness at


Ta=25°C and IL=75mA. The LED lifetime could be decreased if operating IL is larger than 75mA. The

constant current driving method is suggested.

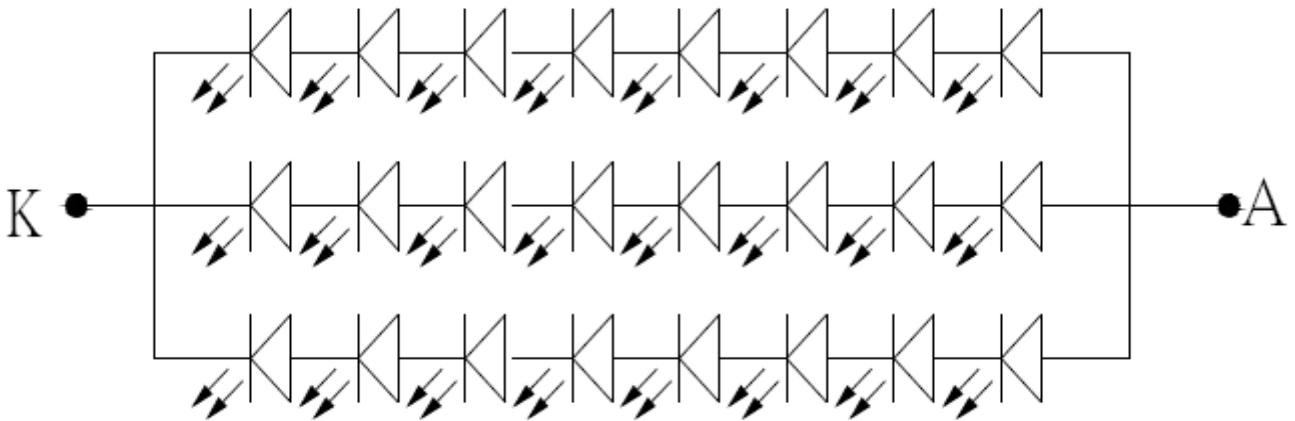



NOTE 3: Luminance Uniformity of these 9 points is defined as below:

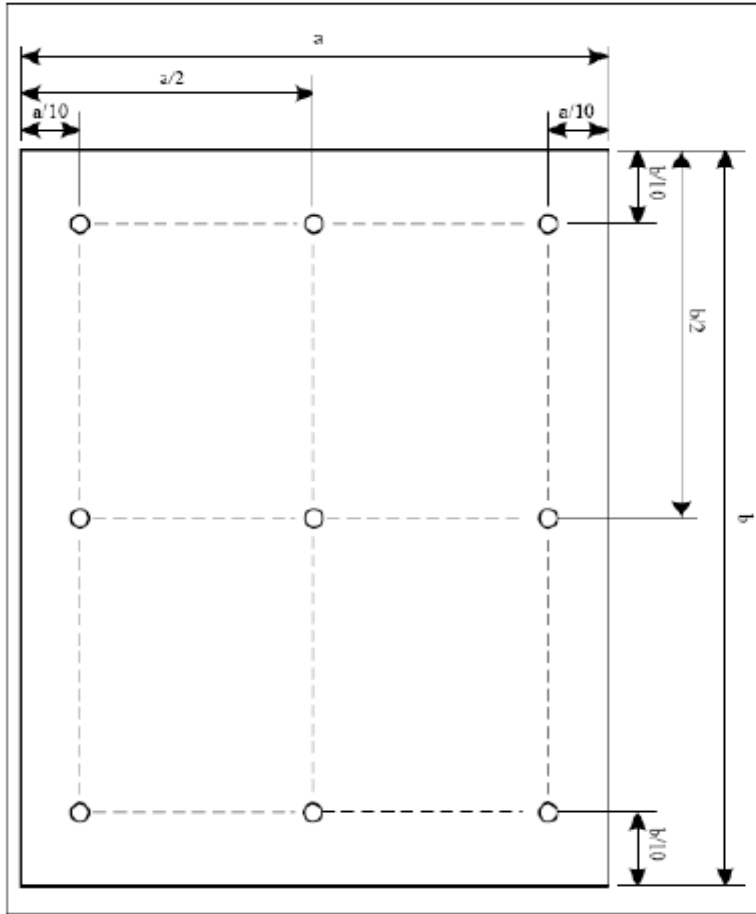

$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$

$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

Part. No	KD080FM-8	REV	V1.1	Page 13 of 27
	常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range




6. SIGNAL TIMING SPECIFICATIONS

6.1 Timing Parameters(Sync mode)

Parameter	Symbol	Value			Unit	Note
		Min.	Recommend	Max.		
DCLK Frequency	F_{DCLK}	48.69	52.59	60.83	MHz	
Horizontal valid data	t_{hd}	1600			DCLK	
Hsync Pulse Width	t_h	1	2	140	DCLK	
Hsync back porch	t_{hbp}	5	16	141	DCLK	
Hsync front porch	t_{hfp}	19	44	155	DCLK	
1 Horizontal Line	t_h	1656	1660	1760	DCLK	
Vertical valid data	t_{vd}	480			H	
Vsync Pulse Width	t_v	1	2	90	H	
Vsync back porch	t_{vbp}	5	5	91	H	
Vsync front porch	t_{vfp}	5	43	91	H	
1 Vertical field	t_v	490	528	576	H	

Notes: This product is Sync mode.

8-bit LVDS input (HSD='L')



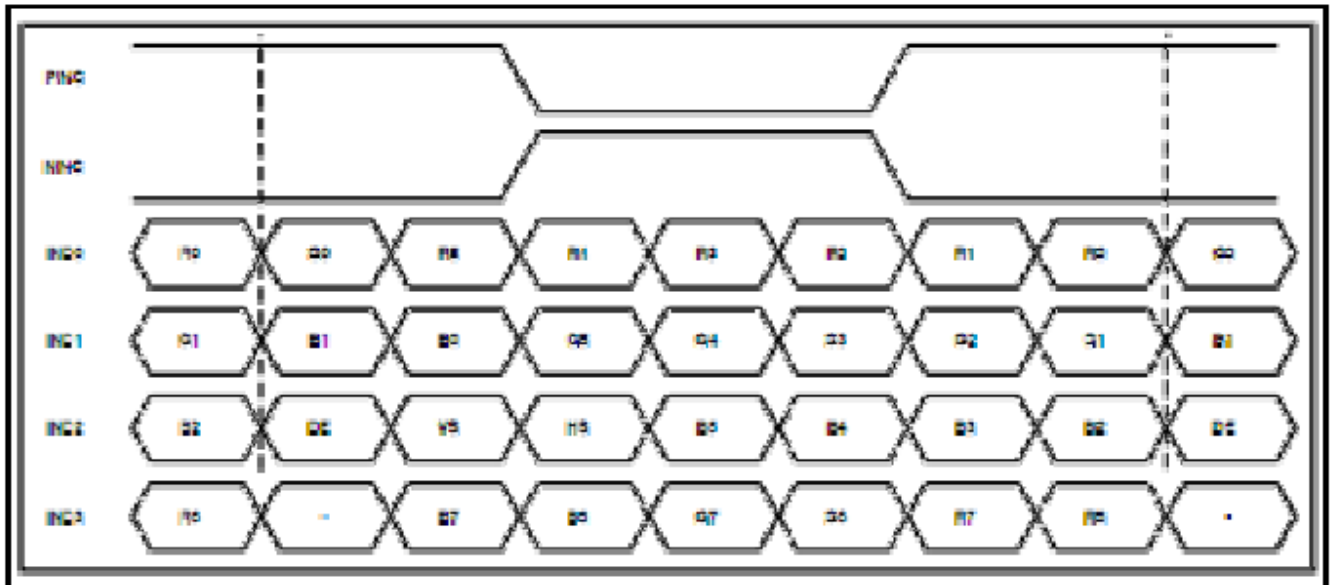




6.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 7

Parameters	Symbols	Min	Typ	Max	Unit	Condition
Clock frequency	RxFCLK	51.02	52.59	54.17	MHz	
Input data skew margin	TRSKM	500	-	-	ps	VID =400mV RxVCM=1.2V RxFCLK=52.59MHz
Clock high time	TLVCH	-	$4/(7 * RxFCLK)$		ns	
Clock low time	TLVCL		$3/(7 * RxFCLK)$		ns	
PLL wake-up time	TenPLL			150	us	

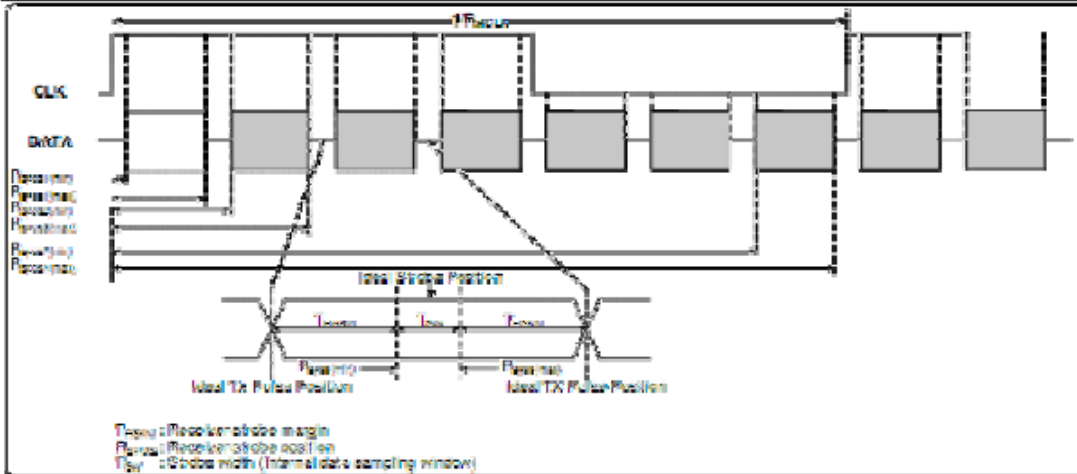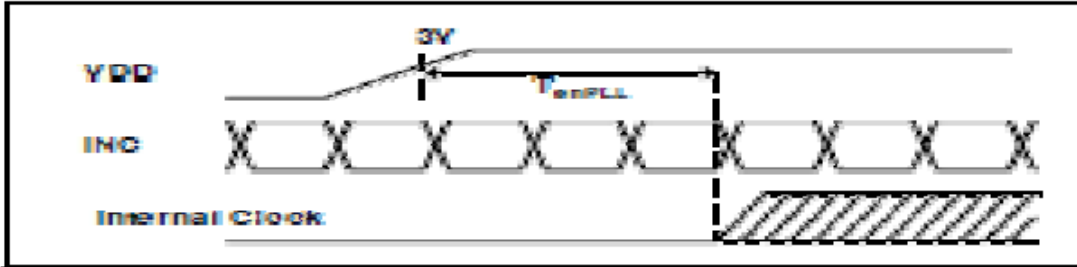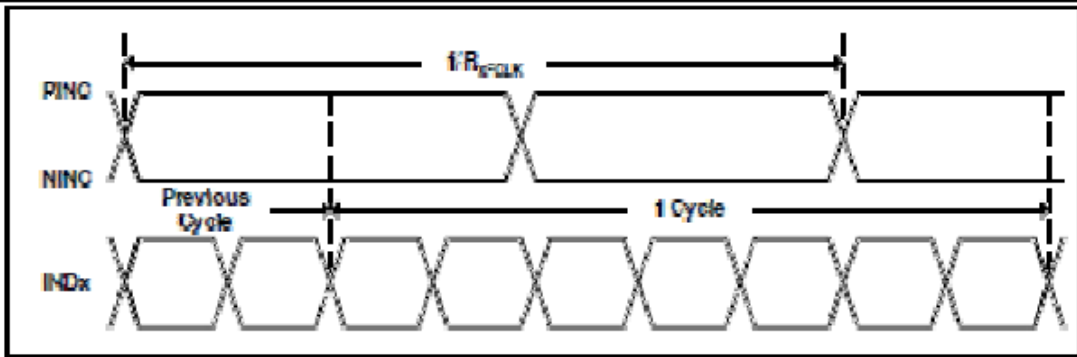

Part. No	KD080FM-8	REV	V1.1	Page 15 of 27
----------	-----------	-----	------	---------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range




6.3 Input Signals, Basic Display Colors & Gray Scale Of Colors

Color & Gray Scale		Input Data Signal																							
		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
	Cyan	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Magenta	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0		
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0		
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	
	▽	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1		
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1		
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	



6.4 Power Sequence


Power on Sequence

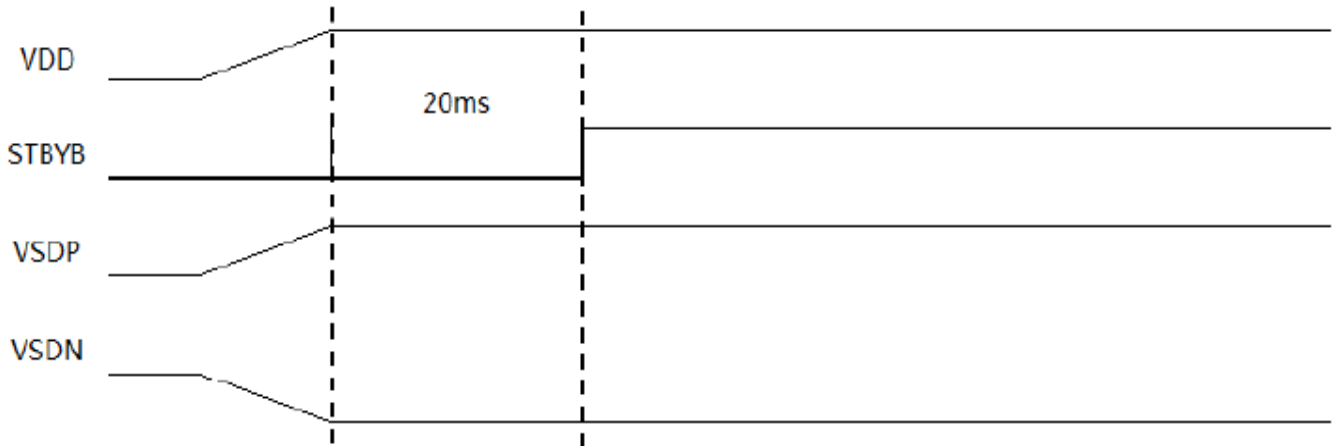

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

Power off Sequence

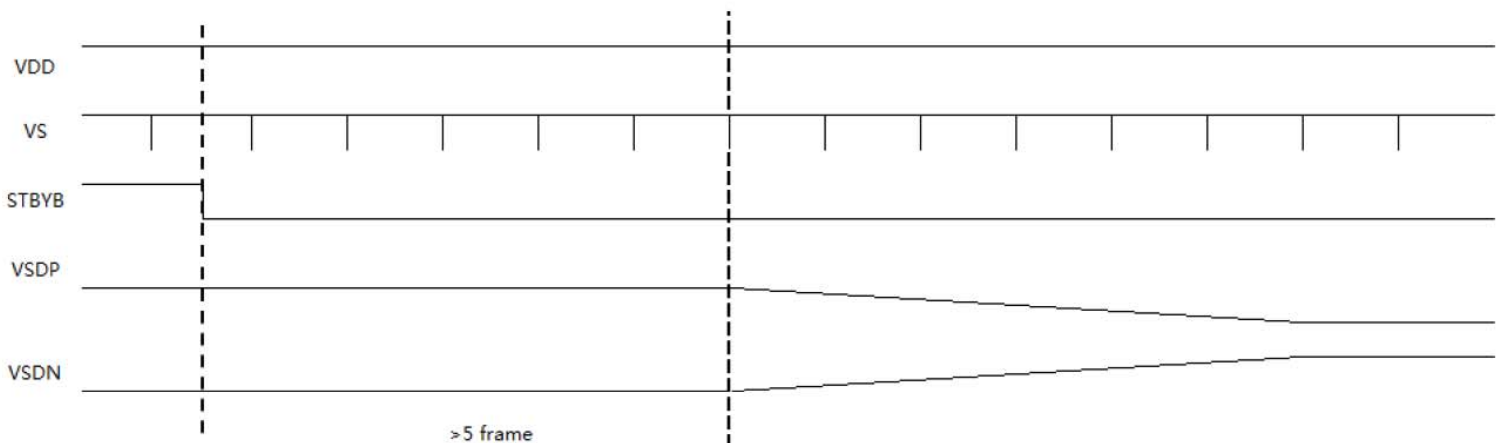

Part. No	KD080FM-8	REV	V1.1	Page 17 of 27
----------	-----------	-----	------	---------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



7. LCD Module Out-Going Quality Level

7.1 VISUAL & FUNCTION INSPECTION STANDARD

7.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.


Temperature : 25±5℃

Humidity : 65%±10%RH


Viewing Angle : Normal viewing Angle.

Illumination: Single fluorescent lamp (300 to 700Lux)

Viewing distance:30-50cm

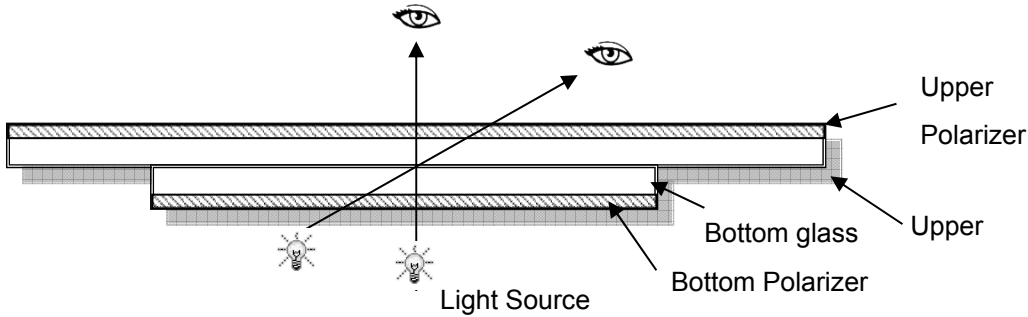

7.1.2 Definition

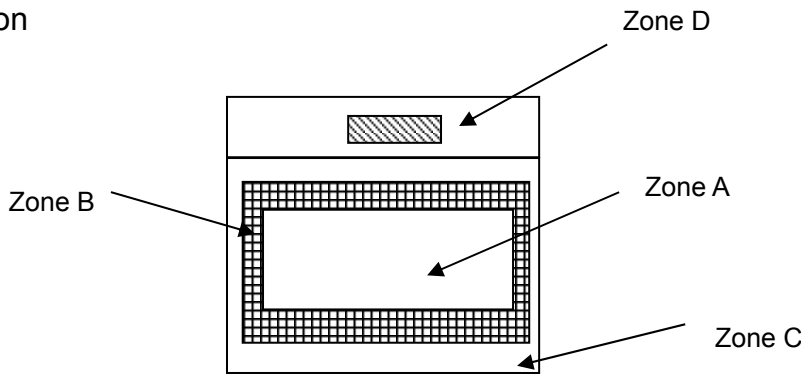

Zone A : Effective Viewing Area(Character or Digit can be seen)

Zone B : Viewing Area except Zone A

Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)

Zone D : IC Bonding Area

Note:

As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer

Part. No	KD080FM-8	REV	V1.1	Page 18 of 27
----------	-----------	-----	------	---------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持少量
NO MOQ

品种齐全
In Full Range



7.1.3 Sampling Plan

According to GB/T 2828-2003 ; , normal inspection, Class II

AQL:




Major defect	Minor defect
0.65	1.5


LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module

No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Spot Line defect	Light dot, Dim spot,Polarizer Bubble ; Polarizer accidented spot.	
6	Soldering appearance	Good soldering , Peeling off is not allowed.	
7	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	



7.1.4 Criteria (Visual)

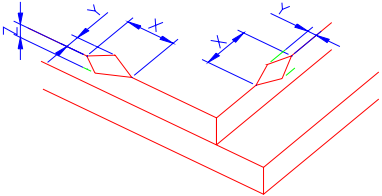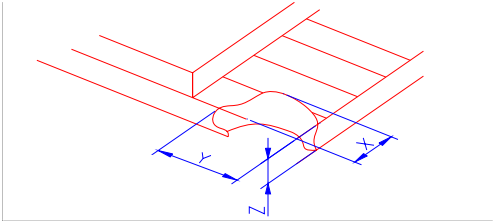Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken NOTE: X: Length Y: Width Z: Height L: Length of ITO, T: Height of LCD	(1) The edge of LCD broken	 <table border="1" data-bbox="756 665 1453 813"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤3.0mm</td> <td><Inner border line of the seal</td> <td>≤T</td> </tr> </tbody> </table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
X	Y	Z						
≤3.0mm	<Inner border line of the seal	≤T						
	(2)LCD corner broken	 <table border="1" data-bbox="834 1122 1374 1220"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤3.0mm</td> <td>≤L</td> <td>≤T</td> </tr> </tbody> </table>	X	Y	Z	≤3.0mm	≤L	≤T
X	Y	Z						
≤3.0mm	≤L	≤T						
	(3) LCD crack	 <p style="text-align: center;">Crack Not allowed</p>						

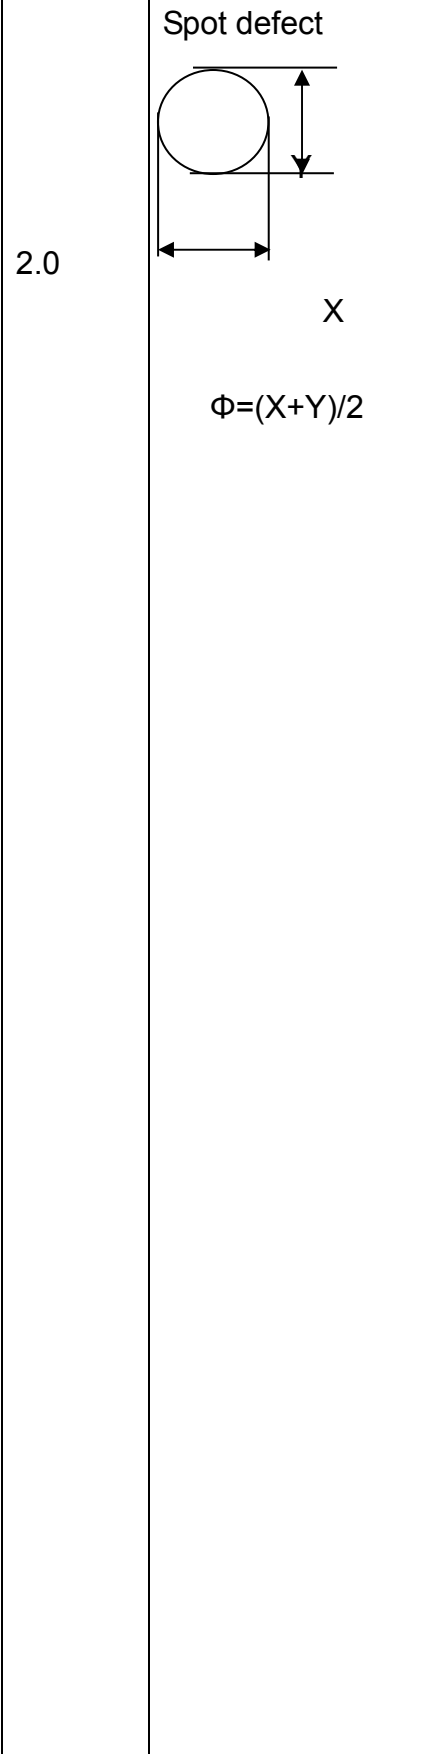

① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.10$	Ignore		
$0.10 < \Phi \leq 0.25$	3(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.3$	2		
$\Phi > 0.35$	0		

② Dim spot (LCD/TP/Polarizer dim dot, light leakage, dark spot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.1$	Ignore		
$0.10 < \Phi \leq 0.25$	3(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.3$	2		
$\Phi > 0.35$	0		

③ Polarizer accidented spot

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore		
$0.3 < \Phi \leq 0.5$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.5$	0		

④ Pixel bad points (light dot, Dim dot, color dot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.1$	Ignore		
$0.15 < \Phi \leq 0.25$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.3$	0		

⑤ Polarizer Bubble




Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore		
$0.3 < \Phi \leq 0.4$	3(distance $\geq 10\text{mm}$)		
$0.4 < \Phi \leq 0.5$	2		
$\Phi > 0.5$	0		



3.0	Line defect (LCD/TP /Polarizer backlight black/white line, scratch, stain)	Width(mm)	Length(m m)	Acceptable Qty		
				A	B	C
		$\Phi \leq 0.05$	Ignore	Ignore		
		$0.05 < W \leq 0.06$	$L \leq 3.0$	$N \leq 2$		
		$0.07 < W \leq 0.08$	$L \leq 2.0$	$N \leq 1$		
	$0.08 < W$	Define as spot defect				
4.0	Electronic Comp onents SMT	Not allow missing parts, solderless connection, cold solder joint, mis match, The positive and negative polarity opposite				
5.0	Display color& B rightness	<p>1. Color : Measuring the color coordinates, The measurement standar d according to the datasheet or samples.</p> <p>2. Brightness : Measuring the brightness of White screen, The measu rement standard according to the datasheet or Samples.</p>				

6.0	RTP Related	TP film bubble/ accidented spot	Size Φ (mm)	Acceptable Qty			
				A	B	C	
			$\Phi \leq 0.1$	Ignore			
			$0.1 < \Phi \leq 0.2$	3 (distance ≥ 10 mm)			
			$0.25 < \Phi \leq 0.3$	2			
			$\Phi > 0.35$	0			
		TP film scratch	Width(mm)	Length(mm)	Acceptable Qty		
					A	B	C
			$\Phi \leq 0.05$	Ignore	Ignore		
			$0.05 < W \leq 0.06$	$L \leq 3.0$	$N \leq 2$		
$0.07 < W \leq 0.08$	$L \leq 2.0$		$N \leq 1$				
	$0.08 < W$	Define as spot defect					



		<p>Assembly deflection</p>	<p>beyond the edge of backlight $\leq 0.2\text{mm}$</p>						
		<p>Bulge (undulation included)</p>	<p>The ITO film plumped below 0.40mm, it's ok.</p> 						
		<p>Newton Ring</p>	<p>Newton Ring area $> 1/3$ TP area NG</p> <p>Newton Ring area $\leq 1/3$ TP area OK</p> 						
		<p>TP corner broken</p> <p>X : length</p> <p>Y : width</p> <p>Z : height</p>	<table border="1" data-bbox="710 1489 1165 1635"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>$X \leq 3\text{mm}$</td> <td>$Y \leq 3\text{mm}$</td> <td>$Z < \text{COVER thickness}$</td> </tr> </table> <p>* *Circuitry broken is not allowed.</p> 	X	Y	Z	$X \leq 3\text{mm}$	$Y \leq 3\text{mm}$	$Z < \text{COVER thickness}$
X	Y	Z							
$X \leq 3\text{mm}$	$Y \leq 3\text{mm}$	$Z < \text{COVER thickness}$							



			X	Y	Z	
		TP edge broken	$X \leq 4\text{mm}$	$Y \leq 2\text{mm}$	$Z < \text{COVER thickness}$	
		X : length Y : width Z : height	* Circuitry broken is not allowed.			

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed



8. Reliability Test Result

8.1 Condition

Item	Condition	Inspection after test
High Temperature Operating	70℃,96H	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1.Air bubble in the LCD; 2.Non-display; 3.Missing segments/line; 4.Glass crack; 5.Current IDD is twice higher than initial value.
Low Temperature Operating	-20℃, 96HR	
High Temperature Storage	80℃, 96HR	
Low Temperature Storage	-30℃, 96HR	
High Temperature & High Humidity Storage	Ta=+60℃, 90% RH ,96 hours.	
Thermal Shock (Non-operation)	-30℃,30 min ↔ 80℃,30 min, Change time:5min 20CYC.	
ESD test	C=150pF, R=330,5points/panel Air:±8KV, 5times; Contact:±6KV, 5 times; (Environment: 15℃~35℃, 30%~60%).	
Vibration (Non-operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total) (Package condition).	
Box Drop Test	1 Corner 3 Edges 6 faces,80cm(MEDIUM BOX)	

Remark:

- 1.The test samples should be applied to only one test item.
- 2.Sample size for each test item is 5~10pcs.
- 3.For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.
- 4.In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

Part. No	KD080FM-8	REV	V1.1	Page 25 of 27
----------	-----------	-----	------	---------------

常备库存
Stock For Sale

长期供货
Long Time supply

支持少量
NO MOQ

品种齐全
In Full Range



9. Cautions and Handling Precautions

9.1 Handling and Operating the Module

- (1) When the module is assembled, it should be attached to the system firmly.
Do not warp or twist the module during assembly work.
- (2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
- (4) Do not allow drops of water or chemicals to remain on the display surface.
If you have the droplets for a long time, staining and discoloration may occur.
- (5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.
Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static; it may cause damage to the CMOS ICs.
- (9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (10) Do not disassemble the module.
- (11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (12) Pins of I/F connector shall not be touched directly with bare hands.
- (13) Do not connect, disconnect the module in the "Power ON" condition.
- (14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

9.2 Storage and Transportation.

- (1) Do not leave the panel in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%
- (2) Do not store the TFT-LCD module in direct sunlight.
- (3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
- (4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.
In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
- (5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD080FM-8	REV	V1.1	Page 26 of 27
	常备库存 Stock For Sale	长期供货 Long Time supply	支持少量 NO MOQ	品种齐全 In Full Range



10. Packing

---TBD-----

Part. No	KD080FM-8	REV	V1.1	Page 27 of 27
	常备库存 Stock For Sale	长期供货 Long Time supply	支持少量 NO MOQ	品种齐全 In Full Range