



**SPECIFICATIONS
FOR
LCM+HDMI Module**

MODULE No:	KD101UXFID008-01_HDMI
CUSTOMER:	

STARTEK	INITIAL	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 1 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Contents

1. Scope.....	4
1.1 Basic Description.....	4
1.2 Mechanical Information.....	4
1.3 Recommended Resolution.....	5
1.4 Plug & Play.....	5
1.5 Power Supply Rating.....	5
1.6 Block Diagram.....	6
1.7 Outline Dimension.....	7
2. Input Terminal Pin Assignment.....	8
3. Operating Instructions:.....	13
4. LCD Optical Characteristics.....	13
4.1 Optical specification.....	13
5. Electrical Characteristics:.....	14
6. Init Timing Command sequence(On sequence).....	16
7. LCD Module Out-Going Quality Level.....	17
8. Reliability Test Results.....	22
9. Cautions and Handling Precautions.....	23
9.1 Handling and Operating the Module.....	23
9.2 Storage and Transportation.....	23
10. Packing.....	24

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 3 of 24
	常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range



1. Scope

This specifications cover the requirements of 10.1” TFT-LCD module with HDMI interface. This module is consist of a Transmissive TFT-LCD Panel, driver circuit, a capacitive touch panel, backlight unit. The LCD module can meet the requirement of RoHS compliance.

1.1 Basic Description

General Information	Items	Specifications	Unit	Note
		Main Panel		
	Display area(AA)	135.36(H)*216.58(V) (10.1 inch)	mm	
	Driver element	TFT active matrix		
	Display colors	16.7M	colors	
	Number of pixels	1200(RGB)*1920	Pixels	
	Pixel arrangement	RGB vertical stripe		
	Pixel pitch	0.1128(H)*0.1128(V)	mm	
	Viewing angle	Free	o'clock	
	LCM Interface	4 LANE MIPI		
	Display mode	Transmissive /Normally Black		
	Operating temperature	-10~+50	°C	
	Storage temperature	-20~+60	°C	
	LCM+CTP Luminance	550nits (Typ.)		
	Video Input	HDMI		
	HDMI it Firmware Version	KD101UXFID008-01_HDMI_V01		

1.2 Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)	-	143	-	mm	
	Vertical(V)	-	228.7	-	mm	
	Depth(D)	-	2.3	-	mm	Excluding components
Weight		-	TBD	-	g	

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 4 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



1.3 Recommended Resolution

Recommended Resolution	1200(RGB)*1920
Supported Resolution	640x480@60 Hz 800x600@60 Hz 1024x600@60 Hz 1024x768@60 Hz 1280x800@60 Hz 1920x1080@50 Hz

1.4 Plug & Play


DDC2B /VESA Standard

1.5 Power Supply Rating

Power Consumption	5.8 Watt (Typ.)
DC POWER	5-12V 2A(Typ.)




1.6 Block Diagram

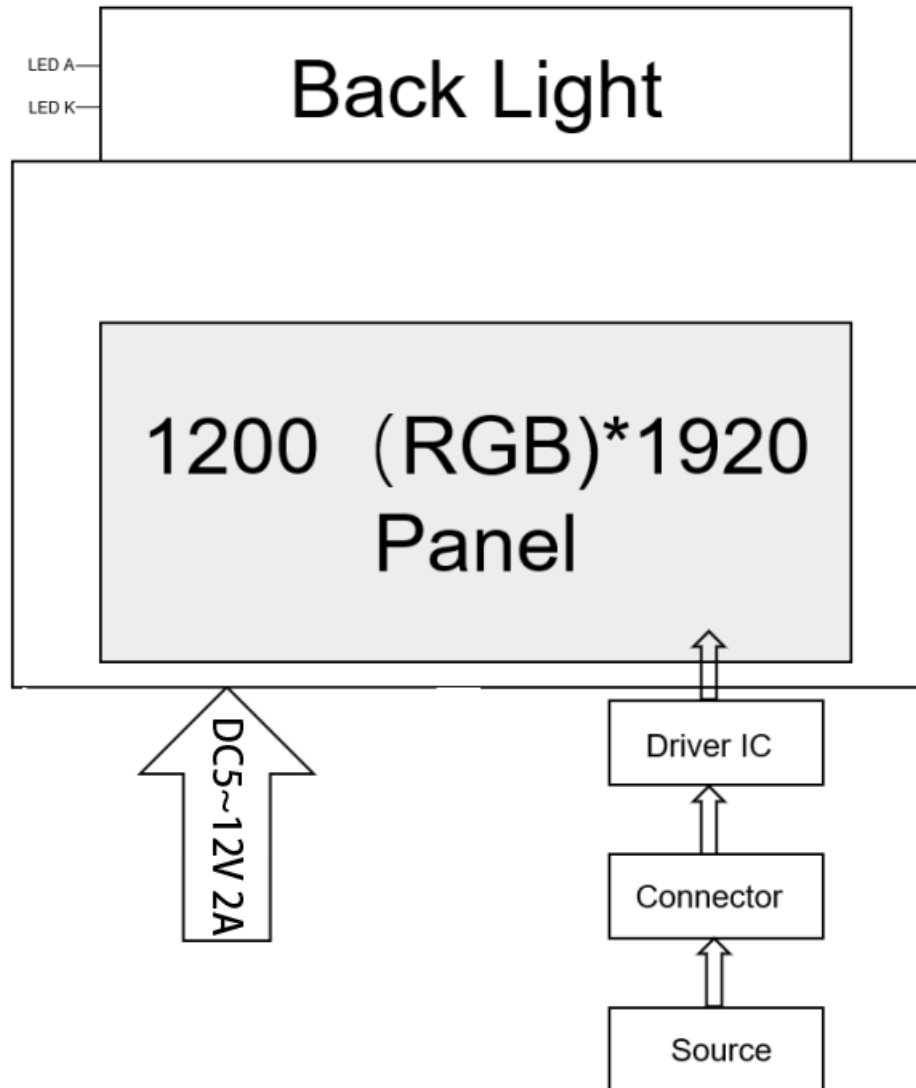

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 6 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



1.7 Outline Dimension

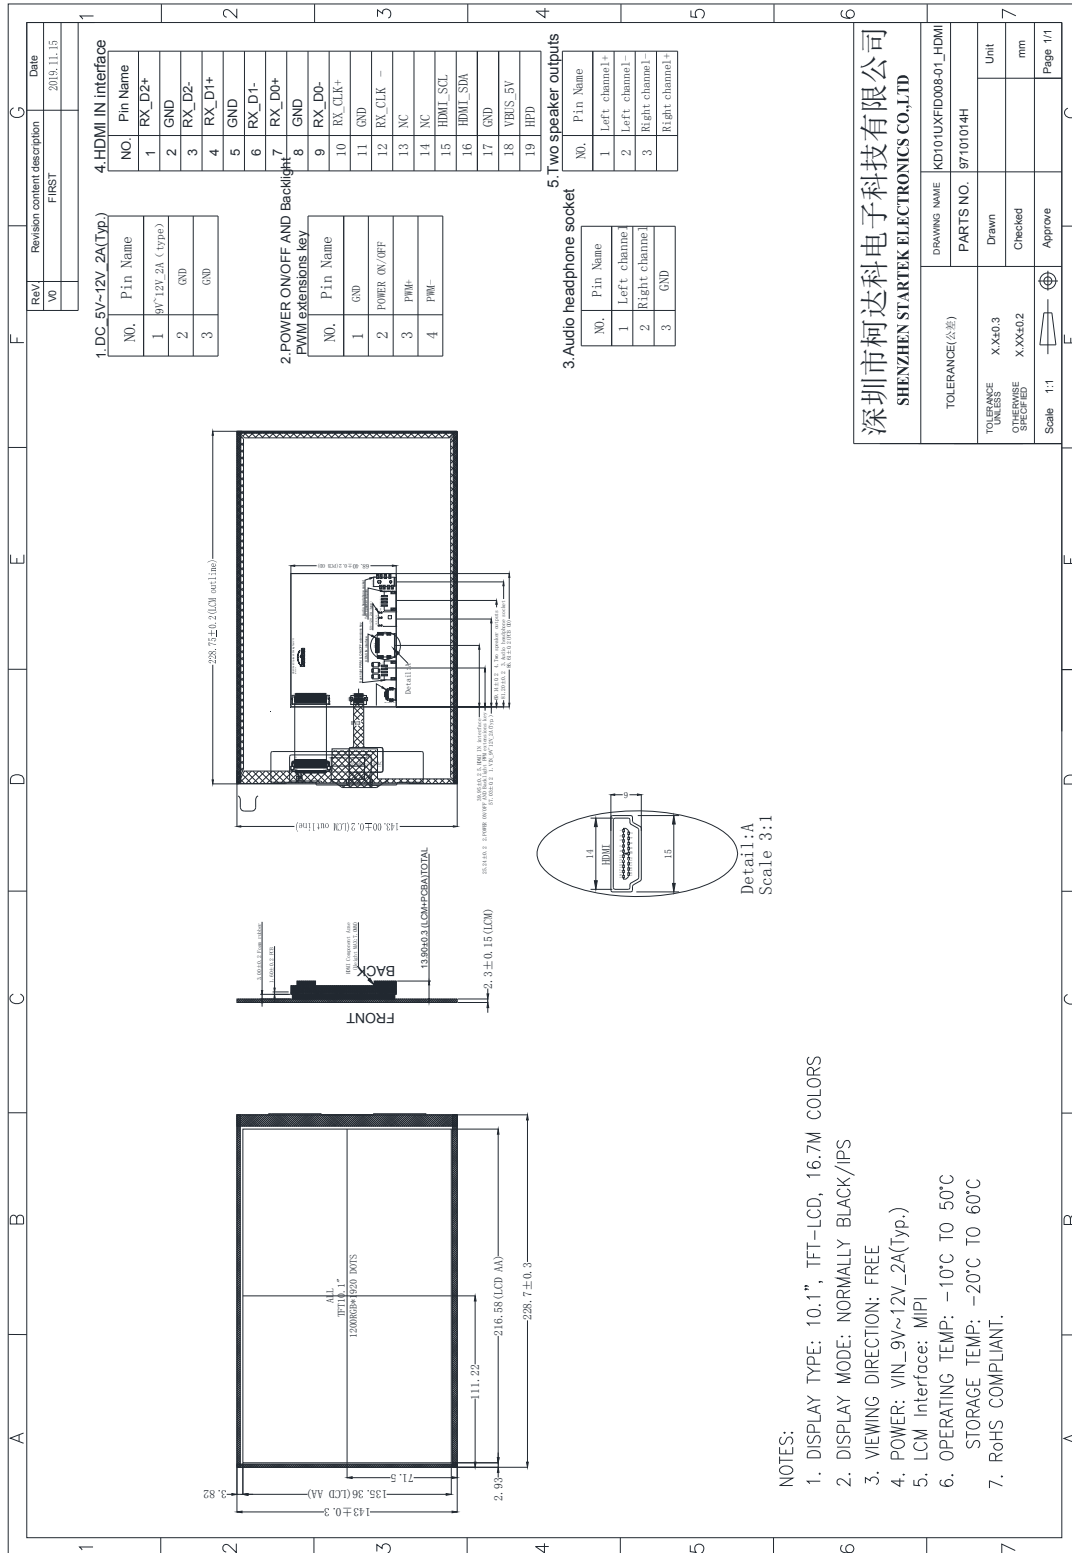

深圳市柯达电子科技有限公司
SHENZHEN STARTEK ELECTRONICS CO.,LTD

TOLERANCE(公差)	DRAWING NAME	KD101UXFID008-01_HDMI
TOLERANCE UNLESS OTHERWISE SPECIFIED	PARTS NO.	97101014H
Scale 1:1	Drawn	Unit
	Checked	mm
	Approve	Page 1/1





Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 7 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	




2. Input Terminal Pin Assignment

2.1 Power input & PIN Definition

NO.	SYMBOL	DISCRIPTION	I/O
1	VIN	Supply voltage(5V~12V,2A Typ.)	P
2	GND	Ground.	P
3	GND	Ground.	P

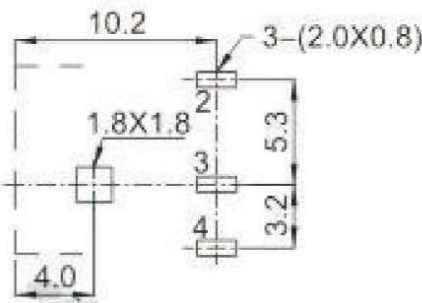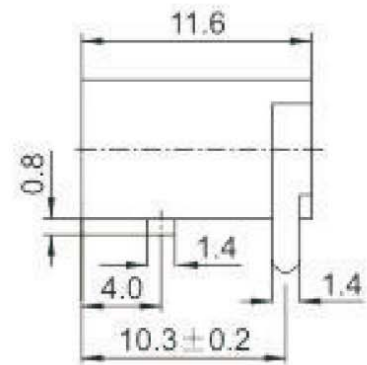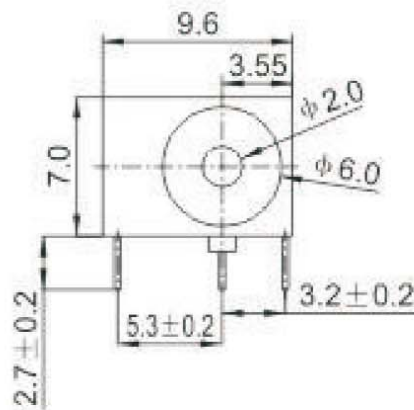

P.C.B Layout








Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 8 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



2.2 POWER ON/OFF AND Backlight PWM extensions key PIN Definition & Signal Connector

note: SMT PH2.0mm spacing connector 4p

NO.	SYMBOL	DISCRIPTION
1	GND	Ground
2	POWER ON/OFF	ON/OFF KEY
3	PWM+	The backlight brightness of each button is increased by one level until the maximum brightness reaches (9 level).
4	PWM-	The backlight brightness of each button is reduced by one level until the lowest brightness reaches (level 9).

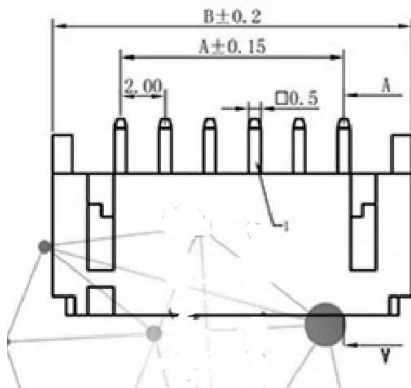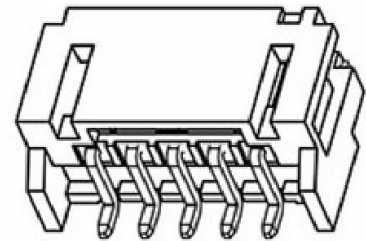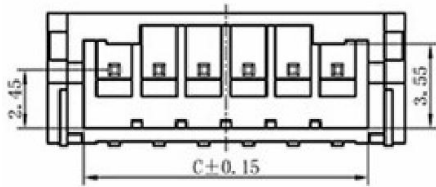



孔位 poles	A	B	C
2	2.00	8.00	4.75
3	4.00	10.00	6.75
4	6.00	12.00	8.75
5	8.00	14.00	10.75
6	10.00	16.00	12.75
7	12.00	18.00	14.75
8	14.00	20.00	16.75
9	16.00	22.00	18.75

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 9 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



2.3 Audio headphone socket PIN Define & Input Signal Connector

NO.	SYMBOL	DISCRIPTION
1	Left channel	Audio output left channel
2	Right channel	Audio output right channel
3	GND	Ground
4	GND	Ground

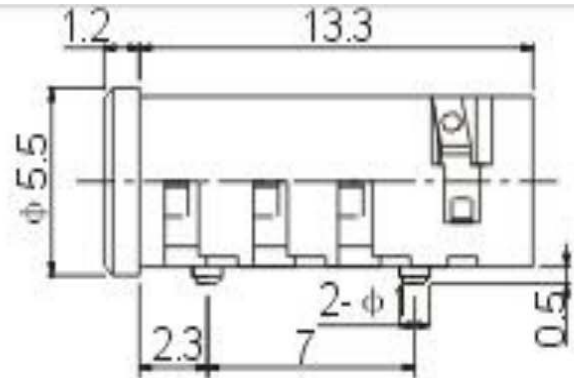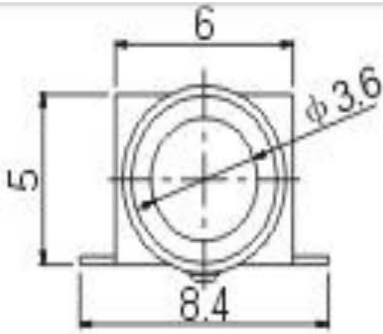

P.C.B Layout(copper-sided view)






Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 10 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



2.4 Two speaker outputs PIN Define & Input Signal Connector

note: SMT PH2.0mm spacing connector 4p

NO.	SYMBOL	DISCRIPTION
1	Left channel+	Audio output left channel
2	Left channel-	
3	Right channel-	Audio output right channel
4	Right channel+	

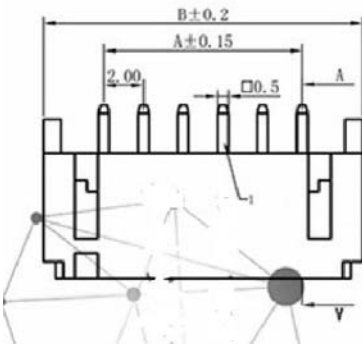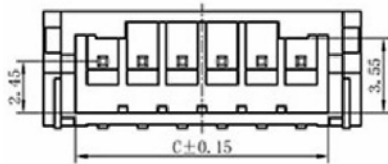

孔位 poles	A	B	C
2	2.00	8.00	4.75
3	4.00	10.00	6.75
4	6.00	12.00	8.75
5	8.00	14.00	10.75
6	10.00	16.00	12.75
7	12.00	18.00	14.75
8	14.00	20.00	16.75
9	16.00	22.00	18.75


Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 11 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



2.5 HDMI PIN Defintion & Signal Connector

NO.	SYMBOL	DISCRIPTION	I/O
1	RX_D2+	HDMI Receiver channel 2 positive analog input.	I
2	GND	Ground.	P
3	RX_D2-	HDMI Receiver channel 2 negative analog input.	I
4	RX_D1+	HDMI Receiver channel 1 positive analog input.	I
5	GND	Ground.	P
6	RX_D1-	HDMI Receiver channel 1 negative analog input.	I
7	RX_D0+	HDMI Receiver channel 0 positive analog input.	I
8	GND	Ground.	P
9	RX_D0-	HDMI Receiver channel 0 negative analog input.	I
10	RX_CLK+	HDMI Receiver clock positive analog input.	I
11	GND	Ground.	P
12	RX_CLK-	HDMI Receiver clock negative analog input.	I
13	NC	No connect	
14	NC	No connect	
15	HDMI_SCL	HDMI Receiver DDC data channel.	I/O
16	HDMI_SDA	HDMI Receiver DDC clock channel.	I
17	GND	Ground.	P
18	HDMI_5V	HDMI Supply voltage (5.0V).	P
19	HPD	HDMI Receiver hot plug detect output	O

Note : HDMI Connector Dimension:

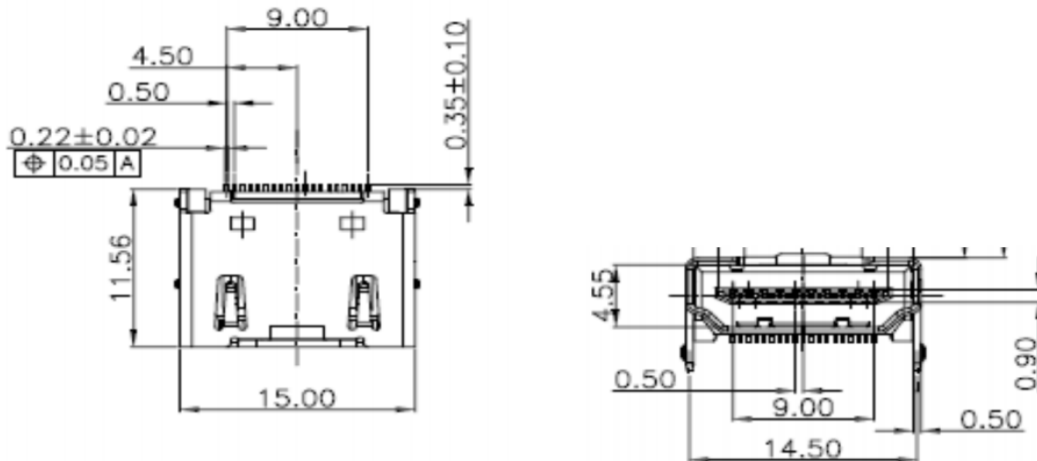

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 12 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



3. Operating Instructions:

3.1 This product supports the following operating systems: Windows 7/8/10, Raspberry Pi, Ubuntu, Andriod.

3.2 Connect the HDMI cable to HDMI output.

3.3 Connect the DC POWER.

Note: HDMI output resolution should be set to 1200*1920 when using Android and Raspberry Pi.

4. LCD Optical Characteristics

4.1 Optical specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit.	Note	
Contrast Ratio	CR	Θ=0 Normal viewing angle	600	800	--			
Response time	Rising		T _{R+T_F}	--	25	50	msec	
	Falling							
Uniformity	S(%)		--	80	--	%		
Color Filter Chromacicity	White	W _X	0.246	0.286	0.326			
		W _Y	0.281	0.321	0.361			
	Red	R _X	0.579	0.619	0.659			
		R _Y	0.289	0.329	0.369			
	Green	G _X	0.261	0.301	0.341			
		G _Y	0.560	0.600	0.640			
	Blue	B _X	0.110	0.150	0.190			
		B _Y	0.019	0.059	0.099			
Viewing angle	Hor.	Θ _L	--	85	--			
		Θ _R	--	85	--			
	Ver.	Θ _U	--	85	--			
		Θ _D	--	85	--			
Option View Direction	ALL VIEW							

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 13 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



5. Electrical Characteristics:

5.1 Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit	Note
Digital Supply Voltage	VDD	-0.3	4.0	V	Note1
Operating temperature	T _{OP}	-10	+50	°C	
Storage temperature	T _{ST}	-20	+60	°C	

NOTE1: If the products are exceeding the above range, they may be permanently damaged.

5.2 LED Backlight Characteristics

The back-light system is edge-lighting type with 28 chips LED

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I _F	140	160	--	mA	
Forward Voltage	V _F	--	24	--	V	
LCM Luminance	LV	400	550	--	cd/m ²	Note3
LED life time	Hr	--	50000	--	Hour	Note1,2
Uniformity	Avg	80	--	--	%	Note3

Note1: LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

T_a=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.


Note 2: The “LED life time” is defined as the module brightness decrease to 50% original brightness at

T_a=25°C and I_L=160mA. The LED lifetime could be decreased if operating I_L is larger than 160mA. The constant current driving method is suggested.


Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 14 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Note (3) Luminance Uniformity of these 9 points is defined as below:

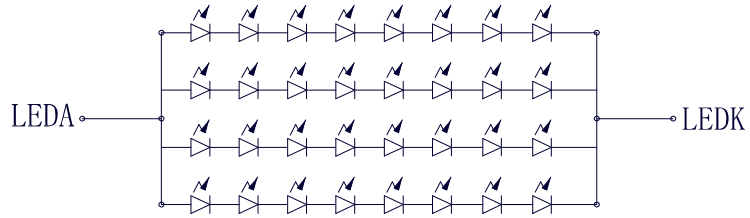

B/L Circuit

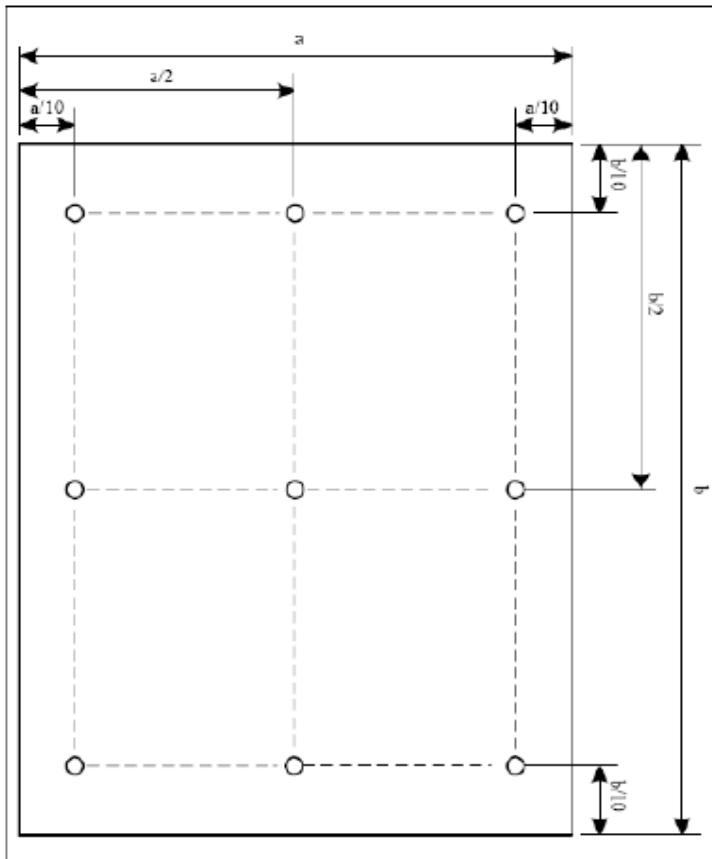

$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$

$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 15 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



6. Init Timing Command sequence(On sequence)

```
//FCLK=156.8M
//MIPICLK=980M
//LANE=4
//HBP=32
//HFP=110
//HSW=1
//VBP=14
//VFP=11
//VSW=1
WriteCMD(0x8C); WriteData(0x8E);
WriteCMD(0xFD); WriteData(0x1F);
WriteCMD(0xF0); WriteData(0xB4);
WriteCMD(0x11); Delay_ms(100);
WriteCMD(0x29);
```

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 16 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持少量 NO MOQ	品种齐全 In Full Range	



7. LCD Module Out-Going Quality Level

7.1 VISUAL & FUNCTION INSPECTION STANDARD

7.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.


Temperature : 25±5°C

Humidity : 65%±10%RH


Viewing Angle : Normal viewing Angle.

Illumination: Single fluorescent lamp (300 to 700Lux)

Viewing distance:30-50cm

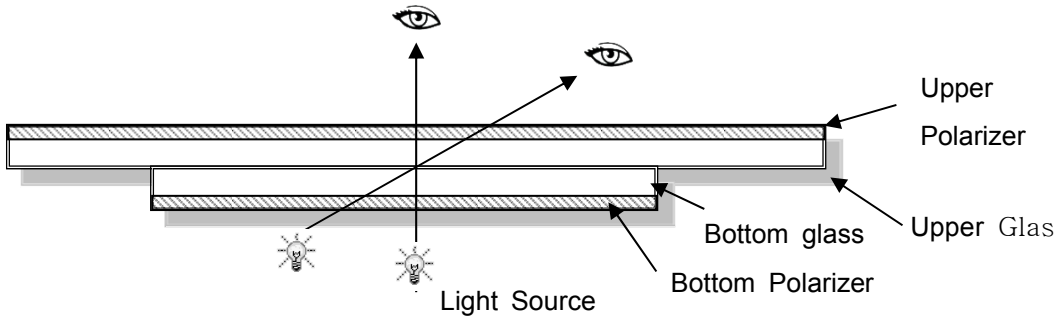

7.1.2 Definition

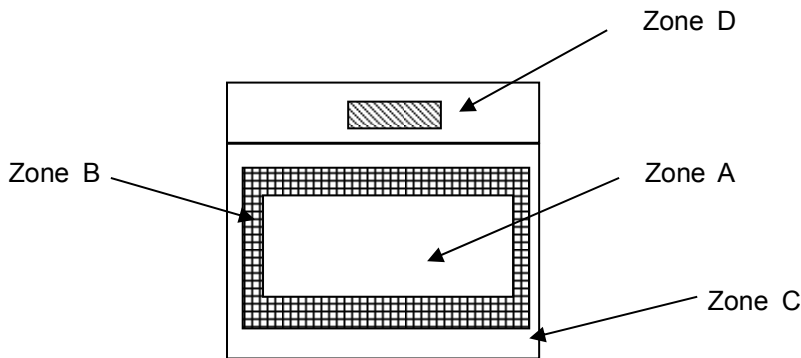

Zone A : Effective Viewing Area(Character or Digit can be seen)

Zone B : Viewing Area except Zone A

Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)

Zone D : IC Bonding Area

Note:As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 17 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



7.1.3 Sampling Plan

According to GB/T 2828.1-2003 ; , normal inspection, Class II

AQL:




Major defect	Minor defect
0.65	1.5

LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module

No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Spot Line defect	Light dot, Dim spot, Polarizer Bubble ; Polarizer accidented spot.	
6	Soldering appearance	Good soldering , Peeling off is not allowed.	
7	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	




7.1.4 Criteria (Visual)

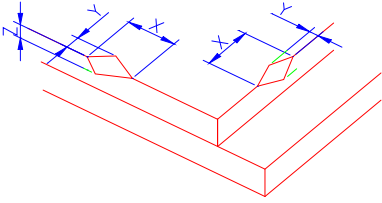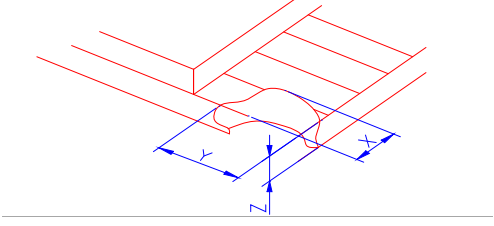Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken NOTE: X: Length Y: Width Z: Height L: Length of IT O, T: Height of LCD	(1) The edge of LCD broken	 <table border="1" data-bbox="756 667 1455 815"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤3.0mm</td> <td><Inner border line of the seal</td> <td>≤T</td> </tr> </tbody> </table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
	X	Y	Z					
	≤3.0mm	<Inner border line of the seal	≤T					
(2)LCD corner broken	 <table border="1" data-bbox="836 1122 1375 1220"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>≤3.0mm</td> <td>≤L</td> <td>≤T</td> </tr> </tbody> </table>	X	Y	Z	≤3.0mm	≤L	≤T	
X	Y	Z						
≤3.0mm	≤L	≤T						
(3) LCD crack	 <p style="text-align: center;">Crack Not allowed</p>							



2.0

Spot defect



Y

X

$$\Phi = (X+Y)/2$$

① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.10$	Ignore		
$0.10 < \Phi \leq 0.25$	4(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.35$	3		
$\Phi > 0.4$	0		

② Dim spot (LCD/TP/Polarizer dim dot, light leakage, dark spot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.1$	Ignore		
$0.10 < \Phi \leq 0.25$	4(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.35$	3		
$\Phi > 0.4$	0		

③ Polarizer accidented spot

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore		
$0.3 < \Phi \leq 0.5$	3(distance $\geq 10\text{mm}$)		
$\Phi > 0.5$	1		

④ Pixel bad points (light dot, Dim dot, color dot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.15$	Ignore		
$0.2 < \Phi \leq 0.3$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.4$	1		

⑤ Polarizer Bubble

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore		
$0.3 < \Phi \leq 0.4$	4(distance $\geq 10\text{mm}$)		
$0.4 < \Phi \leq 0.5$	3		



3.0	Line defect (LCD/TP /Polarizer backlight black/white line, scratch, stain)	Width(mm)	Length(m)	Acceptable Qty		
				A	B	C
		$\Phi \leq 0.05$	Ignore	Ignore		
		$0.05 < W \leq 0.06$	$L \leq 5.0$	N \leq 3		
		$0.07 < W \leq 0.08$	$L \leq 4.0$	N \leq 2		
	$0.08 < W$	Define as spot defect				
4.0	Electronic Components SMT	Not allow missing parts, solderless connection, cold solder joint, mismatch, The positive and negative polarity opposite				
5.0	Display color & Brightness	1. Color: Measuring the color coordinates, The measurement standard according to the datasheet or samples. 2. Brightness: Measuring the brightness of White screen, The measurement standard according to the datasheet or Samples.				
6.0	LCD Mura	By 5% ND filter invisible.				

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed



8. Reliability Test Results

Item	Condition	Inspection after test
High Temperature Operating	70 °C ,96H	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1.Air bubble in the LCD; 2.Non-display; 3.Missing segments/line; 4.Glass crack; 5.Current IDD is twice higher than initial value.
Low Temperature Operating	-20 °C , 96HR	
High Temperature Storage	80 °C , 96HR	
Low Temperature Storage	-30 °C , 96HR	
High Temperature & High Operating	+60 °C , 90% RH ,96 hours.	
Thermal Shock (Non-operation)	-30 °C ,30 min ↔ 80 °C ,30 min, Change time:5min 20CYC.	
ESD test	Air: ±6KV, 5times; Contact: ±4KV, 5 times; 5points/panel.	
Vibration (Non-operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total) (Package condition).	
Box Drop Test	1 Corner 3 Edges 6 faces,80cm(MEDIUM BOX)	

Remark:

- 1.The test samples should be applied to only one test item.
- 2.Sample size for each test item is 5~10pcs.
- 3.For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.
- 4.In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.
- 5.Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 22 of 24
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



9. Cautions and Handling Precautions

9.1 Handling and Operating the Module

- (1) When the module is assembled, it should be attached to the system firmly.
Do not warp or twist the module during assembly work.
- (2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
- (4) Do not allow drops of water or chemicals to remain on the display surface.
If you have the droplets for a long time, staining and discoloration may occur.
- (5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.
Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static; it may cause damage to the CMOS ICs.
- (9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (10) Do not disassemble the module.
- (11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (12) Pins of I/F connector shall not be touched directly with bare hands.
- (13) Do not connect, disconnect the module in the "Power ON" condition.
- (14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

9.2 Storage and Transportation.

- (1) Do not leave the panel in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%
- (2) Do not store the TFT-LCD module in direct sunlight.
- (3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
- (4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.
In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
- (5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 23 of 24
	常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range



10. Packing

---TBD-----

Part. No	KD101UXFID008-01_HDMI	REV	V1.0	Page 24 of 24
	常备库存 Stock For Sale	长期供货 Long Time supply	支持少量 NO MOQ	品种齐全 In Full Range